


TT-TNS

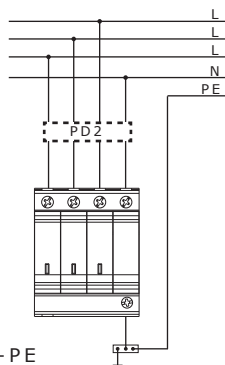

* I_{fi}: N - PE

NUX275-3N (FM)

230/400V
+/- 10%

230/400V
+/- 50%


400/690V
+/- 10%

400/690V
+/- 50%

TNC

230/400V
+/- 10%

TT-TNS



* I_{fi}: N - PE

NUX275-1NX





PD1-PD2



PD1 < PD2
PD1 > PD2

PD1 ≤ 125A
PD2 ≤ 125A


I _{SCCR}	I _{MAX}	I _n (N-PE*)	I _{PE} (xN, Nx)	I _{PE} (xL)	Type	
100 kA a.c.	20 or 40 kA	100 A a.c.	≤ 10 μA	≤ 1000 μA	Type 2 Type 3 / Class II Class III Type 2 / Class II	IEC 61643-11 / EN 61643-11

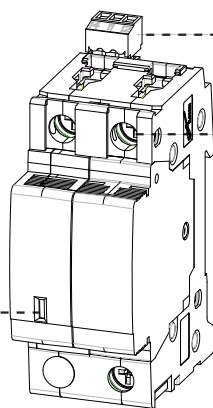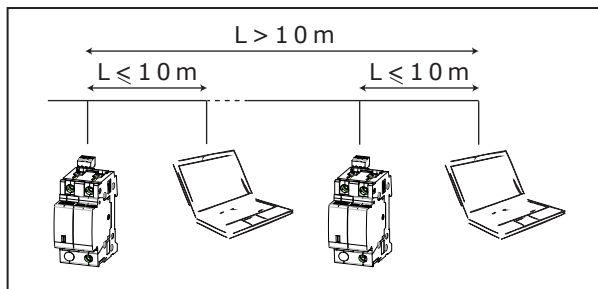

min.: 0,5 mm² / 20 AWG
max.: 1,5 mm² / 16 AWG



min.: 12 V_{dc} / 10 mA
max.: 250 V_{dc} / 1 A



2,8 Nm / 24,5 lb.in

12,5 mm / 0,5 in







min.: 2,5 mm² / 14 AWG
max.: 25 mm² / 4 AWG

12,5 mm / 0,5 in




min.: 2,5 mm² / 14 AWG
max.: 16 mm² / 6 AWG

Red
replace




2CTB 7024 __ R __

Parafoudre
Surge Protective Device
Überspannungsableiter
Scaricatore di sovratensioni
Pararrayo
Protecção contra sobretensões
Skydd mot överspänningar
Защита от перенапряжений
电涌保护器



NUX275-1N

...



NUX275-3N
NUX275-3NFM

...